


PORT
AFT. STB. FWD.

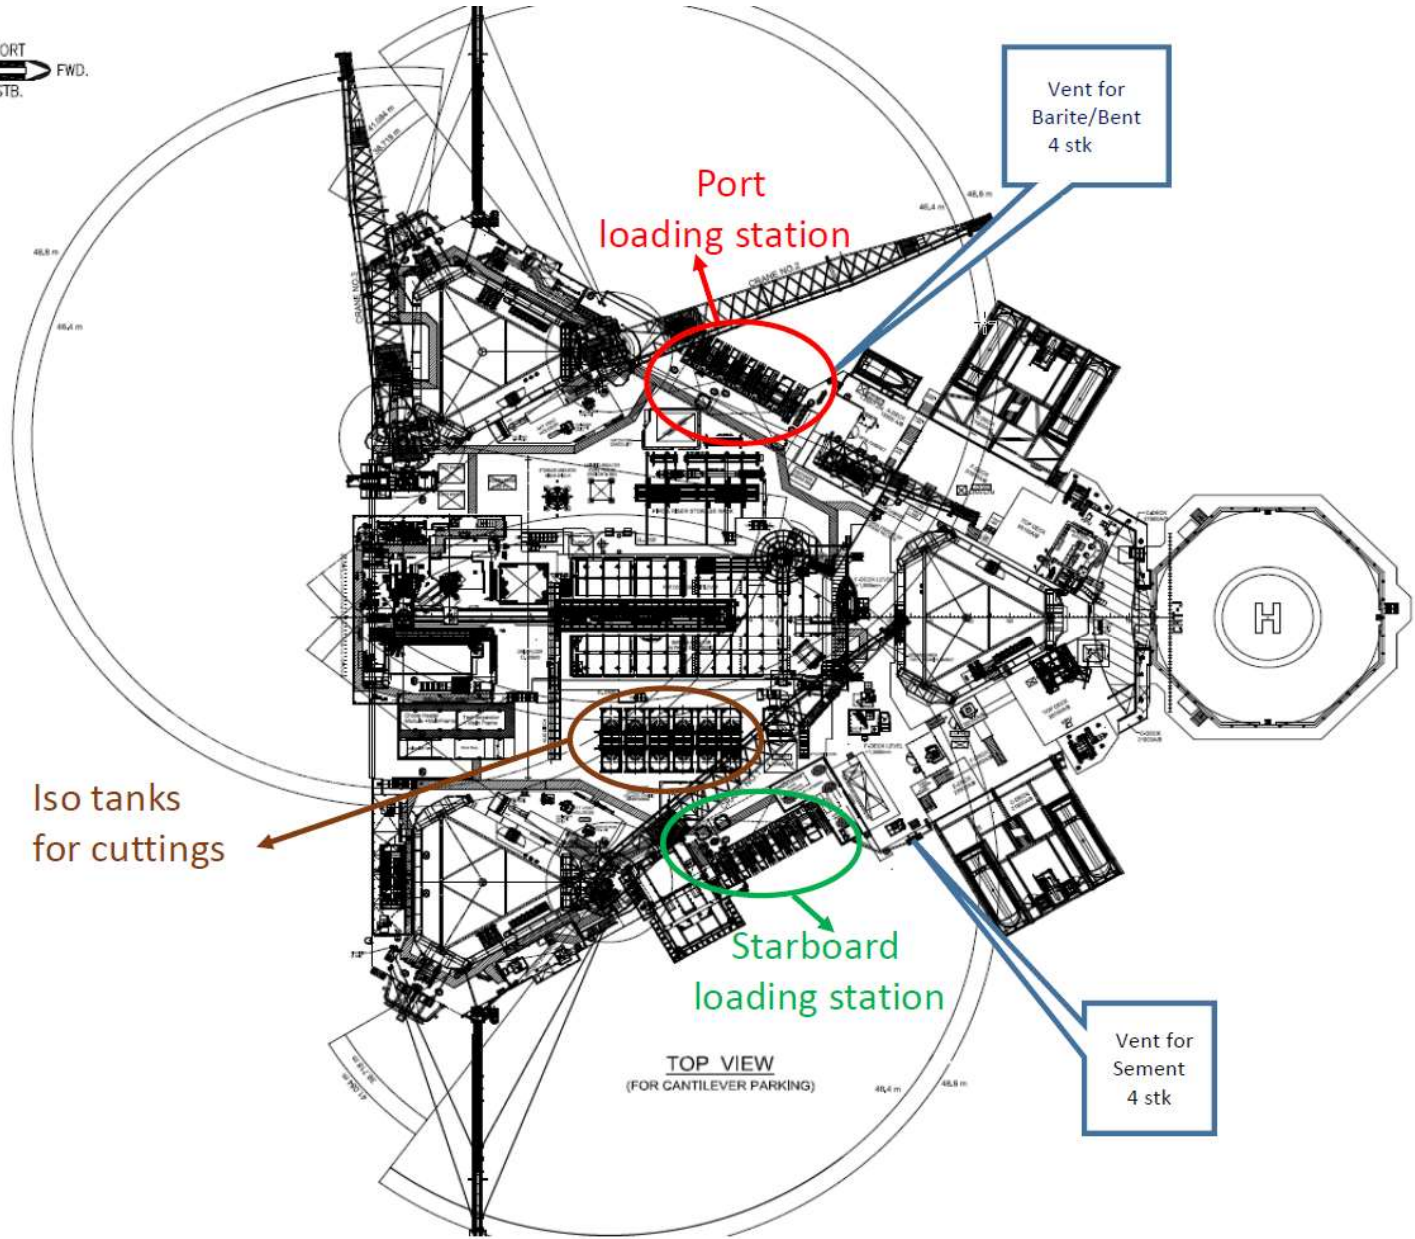

Iso tanks
for cuttings

Starboard
loading station

Vent for
Barite/Bent
4 stk

Vent for
Sement
4 stk

Rig information sheet:

Controlroom: (+47) 52 04 20 00
 Email : kontrollromsoperator.askepott@no.kcadeutag.com
 VHF : 10/16/ 72
 Callsign : LFDG
 MMSI no. : 257459000

Available UHF channels:

Ch. 1 457.525 MHz - Statoil Ch. 110
 Ch. 2 457.550 MHz - Statoil Ch. 111
 Ch. 3 457.575 MHz - Statoil Ch. 112

Crane limits:

Same limits on all cranes:
 Whip line 9,4m to 48,8m : 17,5 tons
 Main line 7,9m : 43,0 tons
 Main line 46,6m : 25,8 tons
 Triple fall 8,0m : 65,0 tons
 Triple fall 46,5m : 27,1 tons

All vessels must comply to GOMO guidelines when entering Askepott 500 meter safety zone. Maximum impact energy (MJ) 10,000 tonnes.